

LC-S5050-04004-RGBW-BW-000

LC-S5050-04004-RGBW-WT-000

SPECIFICATION
RGBW ON TOP SMD TYPE LED

LC-S5050-04004-RGBW-BW-000

LC-S5050-04004-RGBW-WT-000

Description: 5.5x5x1.6mm Top SMD Type 4-chips 0.4 Watt
Power RGBW Flash color LED

Rev. No.: 01

Date: 2014-07-29

Formal Specification



SPECIFICATION OF CHIP ARRAY ON TOP SMD TYPE LED

LC-S5050-04004-RGBW-BW-000

LC-S5050-04004-RGBW-WT-000

RGBW LED provides the leading Chip on Top SMD type of LED technology for high efficiency solid-state lighting solutions. It offers excellent uniformity, flexibility and cost efficiency along with compact size and wide range of color selections. All components are produced by packing high-performance LED chips and silicon resin with proprietary phosphors.

1. Features and Benefits

- . Ideal for LED lighting application to avoid multi-shadows
- . Higher heat conductivity for better thermal management
- . Provide variable and innovative array LED layout designs and combinations
- . Reduce the initial development cost and time
- . High lumen-performance per dollar cost
- . Lead free reflow solder compatible with RoHS compliant


2. Applications

- . Solid State Lighting
- . Indoor/Outdoor/Decoration
- . Signal Light Engine
- . Commercial Display
- . Industrial Light Engine

3. Dimensions and Materials

- . Dimensions: 5.5 mm x 5 mm x 1.6 mm
- . Packages: Top SMD
- . Capsulated Resin: Silicone Resin with Silicate Phosphor
- . Electrodes: Ag Plating
- . Chips: Total 4 chips packed in cavity

Mechanical Dimensions

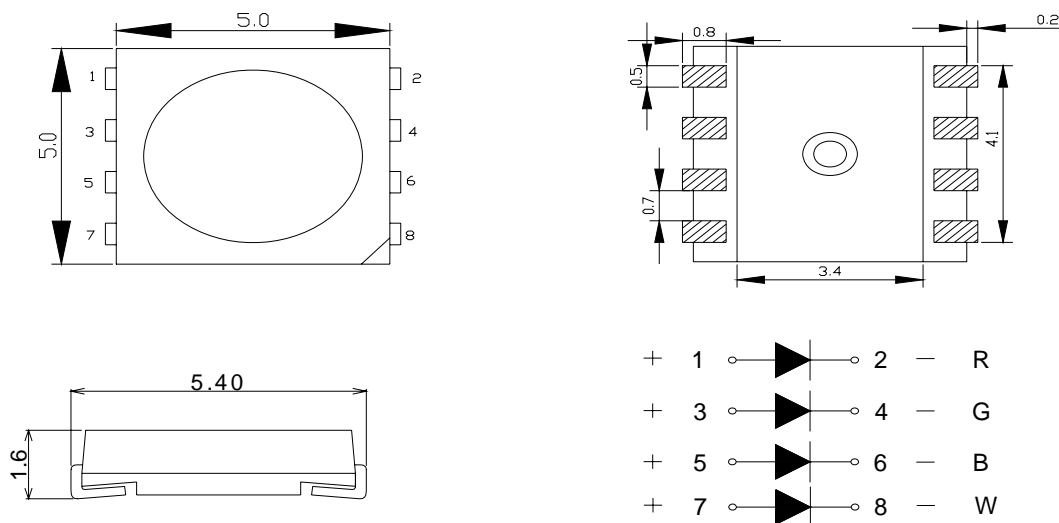

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.2 mm unless otherwise noted

Shenzhen LED Color Opto Electronic Co.,Ltd

4. Electrical/Optical Characteristics

(Thermal Pad Temperature @25°C)

ITEM	SYMBOL	TEST CONDITIONS	UNIT	MIN.	TYP.	MAX.
Forward Voltage	V _f	I _f =4*20 mA	V	1.8	3.2	3.4
Reverse Current	I _r	V _r =5V	μA	-	-	5
Viewing Angle	2 θ 1/2	I _f =4*20 mA	deg	-	120	-
Color Rendering Index(*1)	RA	I _f =4*20 mA	-	70	80	90
Color temperature	CCT	I _f =4*20 mA	K	6000	6500	7000
				2400	2600	2800
Junction/Solder 4 chips on (*1)	R _{θj-c}	I _f =4*20 mA	°C/W	-	-	230
Dominant Wavelength	W _d	R	nm	620	625	630
		G		515	520	525
		B		460	470	475
Luminous Flux(*3)	R	Φ _v	I _f =4*20 mA	lm	-	3
	G				-	4
	B				-	2
	W				6	7

*1: R_{th} test condition: Mounted on PC Board FR 4(pad size ≥16mm²)

*2: Measurement tolerance of the luminous intensity: ±10%. This value for reference only.

*3: Measurement tolerance of the luminous intensity: ±10%.

5. Absolute Maximum Ratings

(Thermal Pad Temperature @25°C)

ITEM	SYMBOL	ABSOLUTE MAXIMUM RATING	UNIT
D.C Forward Current	I _f	4*20	mA
Pulse Forward Current (*1)	I _{fp}	100	mA
Reverse Voltage	V _r	5	V
Power Dissipation	P _d	4x0.065	W
Operating Temperature	T _{opr}	-25~+85	°C
Storage Temperature	T _{stg}	- 40~+100	°C
Soldering Temperature (Reflow) (*2)	T _{sld}	max.240 < 5 sec	°C

*1: I_{fp} conditions: 1/10 Duty Cycle & 0.1ms for pulse width.

*2: Reflow method: 1.6mm from body for 5 seconds not exceeding the recommended maximum temperature.

6. Luminous Flux Rank

LEDs are sorted to Luminous Flux –I_m bins shown. Orders for The LED may be filled with any or all bins contained as below. All Luminous Flux-I_m values shown and specified are at I_F =4x20mA.

	RED		GREEN		Blue		WHITE	
Luminous Flux Rank	C	D	D	E1	B	C	F1	F2
Luminous Flux (lm)	2-3	3-4	3-4	4-5	1-2	2-3	6-7	7-8

Shenzhen LED Color Opto Electronic Co.,Ltd

7. Forward Voltage Rank

LEDs are sorted to VF bins shown. Orders for The LED may be filled with any or all bins contained as below.
All VF values shown and specified are at $I_F = 4 \times 20 \text{mA}$.

Rank	V1	V2	V3	V4	V5	V6	V7	V8
Voltage (V)	1.8-2.0V	2.0-2.2V	2.2-2.4V	2.4-2.6V	2.6-2.8V	2.8-3.0V	3.0-3.2V	3.2-3.4V

Note: Measurement tolerance of the forward voltage: $\pm 0.06\text{V}$

8. Dominant Wavelength Rank


KL-S5050-04004-RGBW-BW/WT-000 Dominant Wavelength Rank

	Red		Green		Blue		
Dominant Wavelength Rank	HR1	HR2	PG2	PG3	BL5	BL6	BL7
Dominant Wavelength(nm)	620-625	625-630	515-520	520-525	460-465	465-470	470-475


Note: Measurement tolerance of the Dominant Wavelength: $\pm 1\text{nm}$

9. Optical-Electrical Characteristic Graphs


Forward Current vs. Typical Relative Luminous Flux

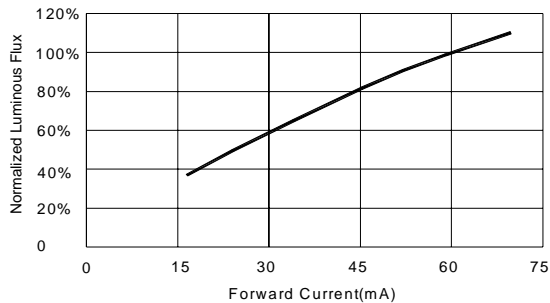


Forward Voltage vs. Forward Current

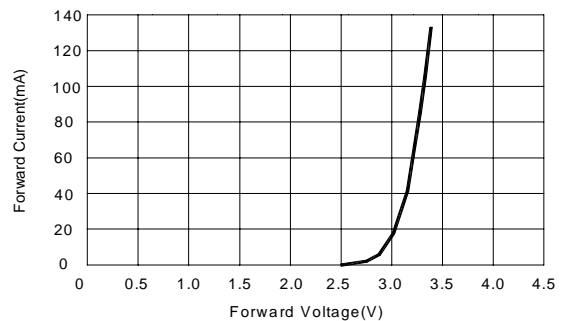


Thermal Pad Temperature vs. Relative Light Output

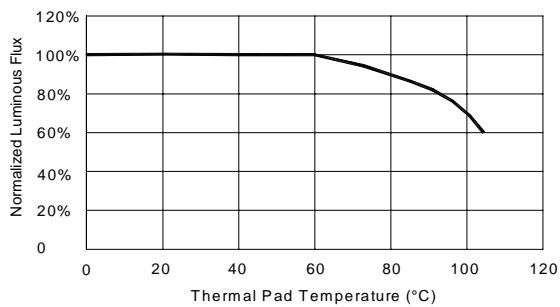


Wavelength Characteristics

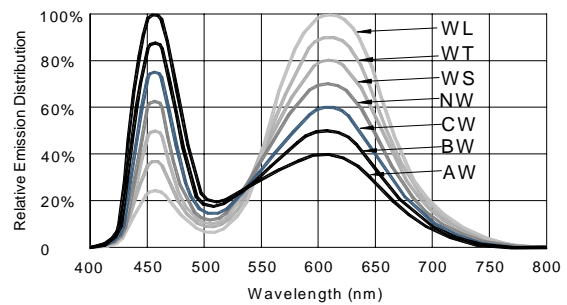

Thermal Pad Temperature vs. Forward Current

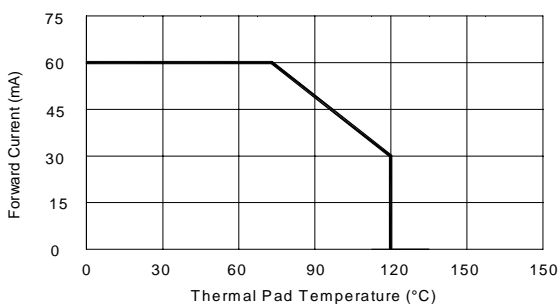

Typical Radiation Pattern 120°

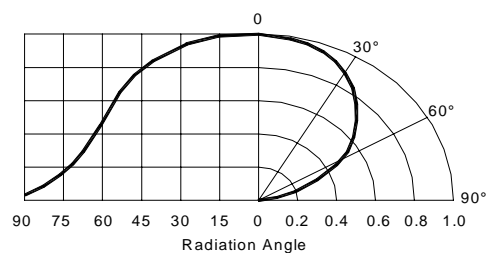

10. Packaging Standard:

LC-S5050-04004-RGBW-BW/WT-000

